



LG VX8560 Side keys Replacement

This guide will demonstrate how to install the keys on the side of the phone

Written By: Kevin





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [LG Chocolate 3 side keys](#) (1)

Step 1 — Side keys




- Sliding the battery cover off and remove the phone's battery. (see [LG VX8560 Battery Replacement](#) steps 1-3 for help)

Step 2



- Using your Phillips screwdriver unscrew all 4 screws along the edge of the phone

Step 3

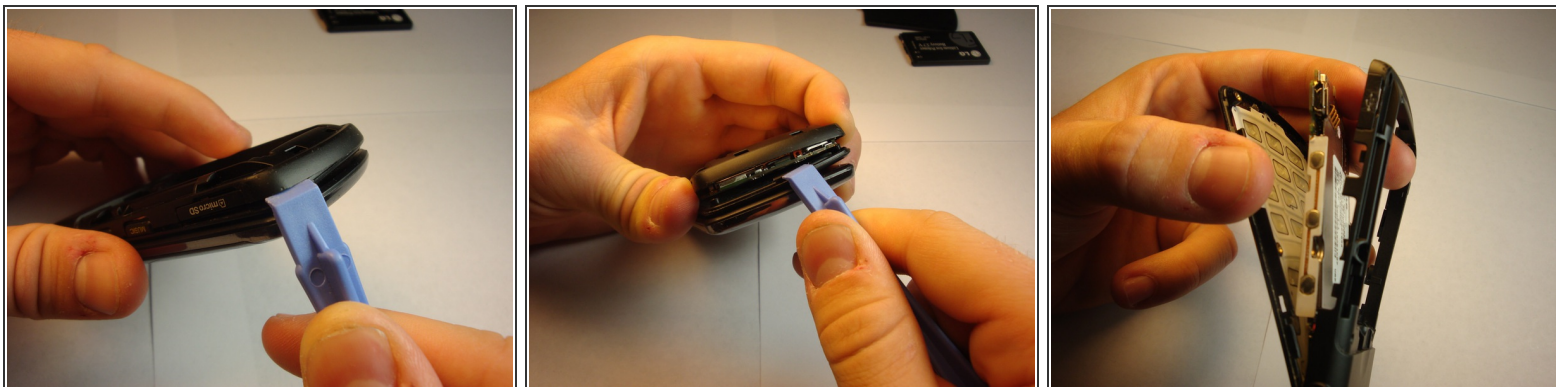

- Using your plastic pry tool, slide the tool between the phone's keypad cover and back cover.
- You should be able to see the motherboard. Don't separate the two covers. They should be held together by a screw at the axis of the phone.

Step 4



- Place the side keys so that they are aligned with the silver circles located on the side of the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 07:21:32 PM.